



### Electrical Specifications

Center Frequency (Fo)	10 MHz
Passband Width @ -3 dB	+/- 500 Hz min
Ripple	1.0 dB max @ Fo +/- 50 Hz
Insertion Loss	6.0 dB max
Stopband Width @ -20dB	+/- 1.2 KHz max
@ -60dB	+/- 5 KHz
Ultimate Attenuation	70 dB min @ Fo +/- 100KHz
Impedance Zin = Zout	50 Ohm
Input Power	-80 to +5dBm

### Operating Temperature




-20°C to +70°C

### Storage Temperature

-40°C to +85°C

### Mechanical Drawing & Pin Connections

Drawing No: MD2400) \$-1

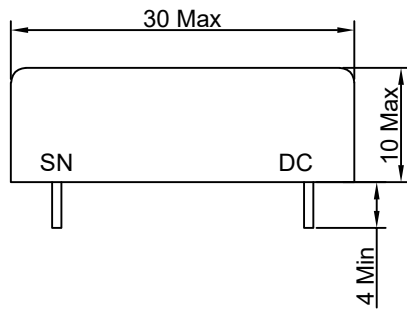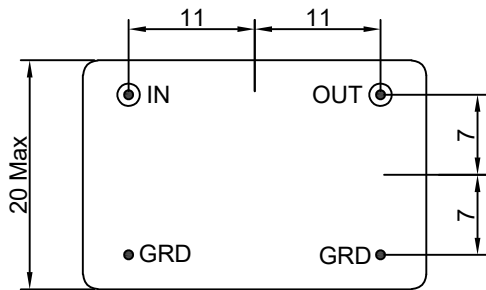

Unit in mm  
1mm = 0.0394 inches