



Features and Benefits

- Frequency range: 10MHz
- Supply voltage: 5.0V
- Steady current: 50mA Max
- Output waveform: Sinewave
- Frequency stability vs. operating temperature: ± 5 ppb
- Aging: ± 0.03 ppm per year
- Operating temperature: -40°C to $+85^{\circ}\text{C}$
- Size: 20.5x15.3x9.0mm



Typical Applications

- Portable Wireless Communications Mobile
- Test equipment
- Synthesizers
- Battery Powered Application

Description

OCXO3307CV-10MHz-A-V offers high frequency stability, low long-term aging and low phase noise, all in a compact package to suit the different communication needs.


Mechanical Drawing & Pin Connections

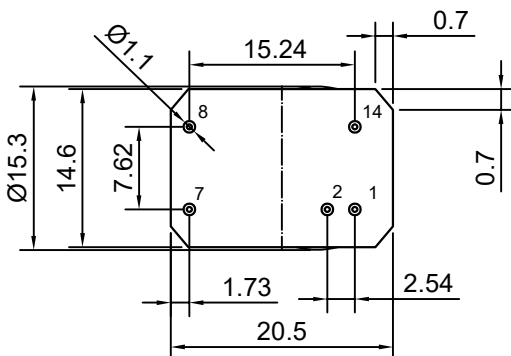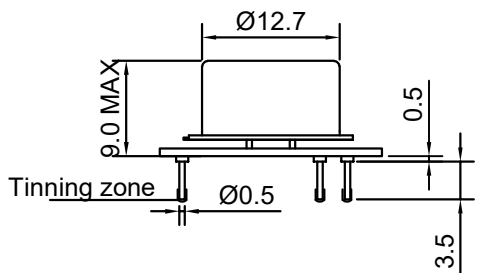

Unit in mm
1mm = 0.0394 inches

Drawing No: MD&(\$\$*%%

Schematic connections

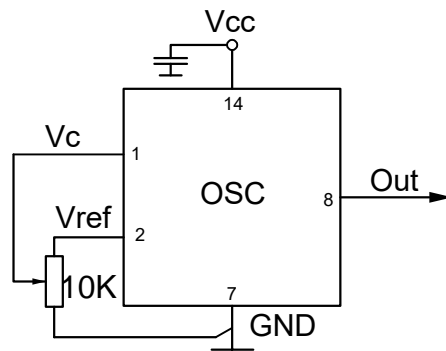

Pin	Signal
1	Control Voltage
2	Reference voltage
7	GND
8	RF Out
14	Supply Voltage



Specifications

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Operational Frequency	f ₀			10		MHz	
RF Output							
Signal Waveform			Sinewave				
Level			+7.0			dBm	note
Harmonics					-30	dBc	
Load			45	50	55	ohm	
Power Supply							
Reference Voltage	V _{ref}		4.0	4.2	4.3	V	
Output resistance of V _{ref}				91		ohm	
Supply Voltage	V _{cc}		4.75	5.0	5.25	V	
Warm-up current		V _{cc} =5.0V	120		220	mA	
Continuous current		at +25°C, V _{cc} =5.0V		35	50	mA	
Frequency warm-up time		to df/f=1e-7 at +25°C ref at 15 min		60	90	sec	
Frequency Adjustment Range							
Electronic Frequency Control (EFC)	(f _L -f)/f	V _c =0 V		-1.0	-0.5	ppm	note
	(f-f)/f	V _c =V _{c0}		0		ppm	
	(f _H -f)/f	V _c =V _{ref}	+0.5	+1.0		ppm	note
EFC voltage	V _c		0		4.2	V	
Input impedance				11kohm//5pF			
Input BW		-3dB level		160		Hz	
Preset control voltage	V _{c0}	disconnected V _c pin	1.9	2.1	2.3	V	
EFC Slope			positive				
Frequency Stability							
Versus Operating Temperature Range		ref +25°C			±5	ppb	note
Initial Tolerance @+25°C	(f-f ₀)/f ₀	V _c = V _{c0}	-0.1		+0.1	ppm	note
Versus supply voltage		ref V _{cc} typ.		±2		ppb	
G-sensitivity		worst axis, 0-2KHz vibration BW			±1.0	ppb/G	
SSB Phase noise (Static. Values are for reference only and are subject to change.)		1Hz		-100		dBc/Hz	
		10Hz		-132			
		100Hz		-155			
		1KHz		-165			
		10KHz		-167			
Aging Per Day		After 30 days of operation			±0.3	ppb	
Aging 1 st Year					±0.0 3	ppm	
Maximum ratings, environmental, mechanical conditions							
Operating temperature range	-40°C to +85°C						
Storage temperature range	-60°C to +85°C						
Power voltage	-0.5 to 6.0 V						
Control voltage	-1.0 to 6.0 V						
Air flow velocity	0.5 m/s maximum						
Humidity	Non-condensing 95%						
Mechanical shock	Per MIL-STD-202, 30G, 11ms						
Vibration	Per MIL-STD-202, 10G to 2000Hz						
Soldering conditions	Hand solder only – not reflow compatible 260°C 10s (on pins)						
Washing conditions	Washing with water or alcohol based detergent allowed only with final enough drying stage						

Note: Included in the test data