



### Features and Benefits

- Frequency range: 28.8MHz
- Supply voltage: 5V
- Steady current: 50mA Max
- Output waveform: Sinewave
- Frequency stability vs. operating temperature:  $\pm 5$ ppb
- Aging:  $\pm 0.1$ ppm per year
- Operating temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Size: 20.5x15.3x9.5mm
- Package type: Through hole

### Typical Applications



- Wireless Communications
- Test equipment
- Synthesizers

### Description

OCXO3307CV-28.8MHz-A-V offers high frequency stability, good long-term aging and low phase noise, all in a compact package to suit the different communication needs.


### Mechanical Drawing & Pin Connections

Drawing No: MD250004-1

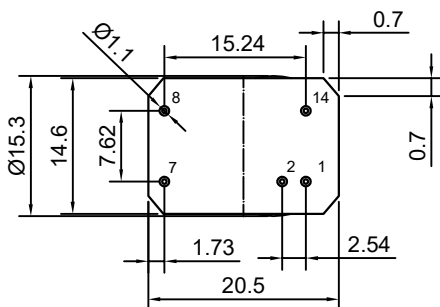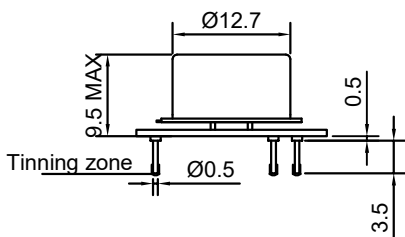

Unit in mm  
1mm = 0.0394 inches

### Schematic connections

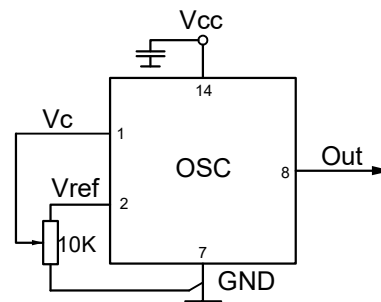

Pin	Signal
1	Control Voltage
2	Reference voltage
7	GND
8	RF Out
14	Supply Voltage



**Specifications**

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Operational Frequency	$f_0$			28		MHz	
<b>RF Output</b>							
Signal Waveform			Sinewave				
Level			+7			dBm	note
Harmonics					-25	dBc	
Load			45	50	55	ohm	
<b>Power Supply</b>							
Reference Voltage	Vref		4	4.2	4.3	V	
Supply Voltage	Vcc		4.75	5	5.25	V	
Warm-up current		V <sub>CC</sub> =5V	120		220	mA	
Continuous current		at +25°C, V <sub>CC</sub> =5V		35	50	mA	
Frequency warm-up time		to $df/f=1e-7$ at +25°C ref at 15 min		90		sec	
<b>Frequency Adjustment Range</b>							
Electronic Frequency Control (EFC)	$(f_L-f)/f$	V <sub>C</sub> =0 V			-0.5	ppm	note
	$(f-f)/f$	V <sub>C</sub> =V <sub>C0</sub>		0		ppm	
	$(f_H-f)/f$	V <sub>C</sub> =Vref	+0.5			ppm	note
EFC voltage	V <sub>C</sub>		0		4.2	V	
Slope				Positive			
Input impedance	R <sub>in</sub>			11		Kohm	
Input impedance	C <sub>in</sub>			5		pF	
Input BW		-3dB level		160		Hz	
Preset control voltage	V <sub>CO</sub>	disconnected V <sub>C</sub> pin	1.9	2.1	2.3	V	
Output resistance of Vref				91		ohm	
<b>Frequency Stability</b>							
Versus Operating Temperature Range		ref +25°C			±5	ppb	note
Initial Tolerance @ +25°C	$(f-f_0)/f_0$	V <sub>C</sub> = V <sub>CO</sub>	-0.1		+0.1	ppm	note
Versus supply voltage		ref V <sub>CC</sub> typ.			±2	ppb	
Versus load		5% change			±2	ppb	
SSB Phase noise (Static. Values are for reference only and are subject to change.)		10Hz		-100		dBc/Hz	
		100Hz		-130			
		1KHz		-155			
		10KHz		-165			
		100KHz		-168			
Aging Per Day		After 30 days of operation			±1	ppb	
Aging 1 <sup>st</sup> Year					±0.1	ppm	
<b>Maximum ratings, environmental, mechanical conditions</b>							
Operating temperature range	-40°C to +85°C						
Storage temperature range	-60°C to +85°C						
Power voltage	-0.5 to 6 V						
Control voltage	-1.0 to 6 V						
Air flow velocity	0.5 m/s maximum						
Humidity	Non-condensing 95%						
Mechanical shock	Per MIL-STD-202, 30G, 11ms						
Vibration	Per MIL-STD-202, 10G swept sine 10 to 2000Hz						
Soldering conditions	Hand solder only – not reflow compatible 260°C 10s (on pins)						
Washing conditions	Washing with water or alcohol based detergent allowed only with final enough drying stage						

Note: Included in the test data