



### Features and Benefits

- Frequency range: 100MHz
- Supply voltage: 5V
- Steady current: 50mA Max
- Output waveform: Sinewave
- Frequency stability vs. operating temperature:  $\pm 30$ ppb
- Aging: 0.05ppm per year
- Operating temperature: -25°C to +85°C
- Size: 20.5x15.3x9.5mm
- Package type: Through hole

### Typical Applications



- Portable Wireless Communications Mobile Test equipment
- Synthesizers
- Battery Powered Application

### Description

OCXO3307CV-LN-100MHz-B-V offers high frequency stability, low long-term aging and low phase noise, all in a compact package to suit the different communication needs.


### Mechanical Drawing & Pin Connections

Drawing No: MD250004-1

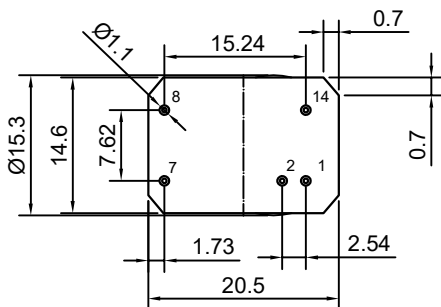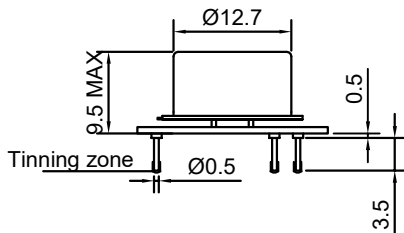

Unit in mm  
1mm = 0.0394 inches

### Schematic connections

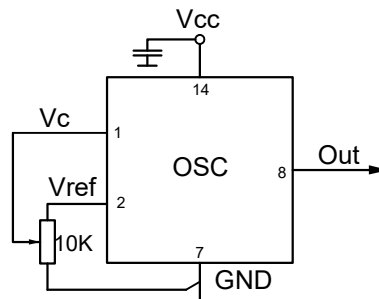

Pin	Signal
1	Control Voltage
2	Reference voltage
7	GND
8	RF Out
14	Supply Voltage



**Specifications**

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Operational Frequency	f <sub>0</sub>			100		MHz	
<b>RF Output</b>							
Signal Waveform			Sinewave				
Level			+10	+12		dBm	note
Harmonics					-30	dBc	
Load			45	50	55	ohm	
Spurious level		f <sub>s</sub> =f <sub>0</sub> ±2MHz			-80	dBc	
<b>Power Supply</b>							
Supply Voltage	V <sub>cc</sub>		4.75	5	5.25	V	
Warm-up current		V <sub>cc</sub> =5V	120		220	mA	
Continuous current		at +25°C, V <sub>cc</sub> =5V		35	50	mA	
Frequency warm-up time		to df/f=1e-7 at +25°C ref at 15 min		60		sec	
Reference voltage	V <sub>ref</sub>		4.1	4.2	4.3	V	
<b>Frequency Adjustment Range</b>							
Electronic Frequency Control (EFC)	(f <sub>L</sub> -f)/f	V <sub>c</sub> =0 V			-1	ppm	note
	(f-f)/f	V <sub>c</sub> =V <sub>co</sub>		0		ppm	
	(f <sub>H</sub> -f)/f	V <sub>c</sub> =V <sub>ref</sub>	+1			ppm	note
EFC voltage	V <sub>c</sub>		0		4.2	V	
Input impedance				11kohm/5pF			
Input BW		-3dB level		160		Hz	
Preset control voltage	V <sub>co</sub>	disconnected V <sub>c</sub> pin	1.9	2.1	2.3	V	
EFC Slope			positive				
Output resistance of V <sub>ref</sub>				91		ohm	
<b>Frequency Stability</b>							
Versus Operating Temperature Range		ref +25°C			±30	ppb	note
Initial Tolerance @+25°C	(f-f <sub>0</sub> )/f <sub>0</sub>	V <sub>c</sub> = V <sub>co</sub>	-0.1		+0.1	ppm	note
Versus supply voltage		ref V <sub>cc</sub> typ.			±5	ppb	
Overall		Initial accuracy + Temp + Load + Supply + Aging 10 years; 5% change			±0.5	ppm	
G-sensitivity		worst axis			±1	ppb/G	
Allan deviation		1 s. 100 kHz BW			2	ppb	
SSB Phase noise (Static)		10Hz		-95	-90	dBc/Hz	
		100Hz		-125	-120		
		1KHz		-155	-150		
		10KHz		-168	-165		
		100KHz		-170	-165		
		1MHz		-172	-167		
Aging Per Day		After 30 days of operation			±0.5	ppb	
Aging 1 <sup>st</sup> Year					±0.05	ppm	
<b>Maximum ratings, environmental, mechanical conditions</b>							
Operating temperature range	-25°C to +85°C						
Storage temperature range	-60°C to +85°C						
Power voltage	-0.5 to 6 V						
Control voltage	-1.0 to 6 V						
Air flow velocity	0.5 m/s maximum						
Humidity	Non-condensing 95%						
Mechanical shock	Per MIL-STD-202, 30G, 11ms						
Vibration	Per MIL-STD-202, 10G swept sine 10 to 2000Hz						
Soldering conditions	Hand solder only – not reflow compatible 260°C 10s (on pins)						
Washing conditions	Washing with water or alcohol based detergent allowed only with final enough drying stage						

Note: Included in the test data