



### Features and Benefits


- Frequency Range: 346-364MHz
- Supply Voltage:5.0V
- Current: 30mA Max.
- 3 wire serial Fractional PLL
- Output power: +4.0dBm Max.
- Phase noise: -112dBc/Hz@10KHz
- Operating temperature: -40°C--+85°C
- Size:15x15x3.7mm
- Package type: SMD

### Typical Applications

- Broadcast
- VHF radio
- Wireless Telemetry
- Test Instrument – Signal Generation

### Mechanical Drawing & Pin Connections

Drawing No: MD240065-1

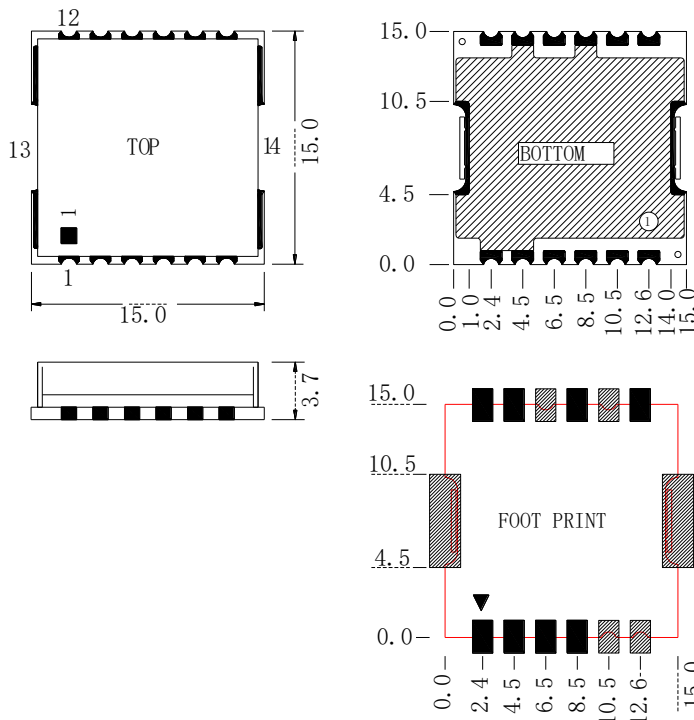

Pin Connections:

Pin	Function
1	CLK
2	DATA
3	LE
4	Ref. IN
5&6	GND
7	VCC(VCO)
8	GND
9	RF Out
10	GND
11	Lock Detect
12	Vcp(PLL)
13&14	GND

Unit in mm  
1mm = 0.0394 inches



### Specifications

Parameter	Units	Min.	Typical	Max.
Operating Frequency Range	MHz	346		364
Output Power	dBm	-2.0	0.0	+4.0
Step Size	KHz		125	
Settling Time	msec		10	30
Output Impedance	$\Omega$		50	
Phase Noise @1kHz offset	dBc / Hz		-83	-78
Phase Noise @10kHz offset	dBc / Hz		-112	-97
Phase Noise @100kHz offset	dBc / Hz		-133	-128
Phase Noise @1MHz offset	dBc / Hz		-140	-135
2nd Harmonic Suppression	dBc		-45	-20
Sideband Spurious Suppression	dBc			-70
Reference (input frequency)	MHz	5		100
Reference (input level)	dBm	-5		+5
VCO Power Supply (Vcc) Voltage	Vdc		5	
VCO Power Supply (Vcc) Current	mA		18	30
PLL Power Supply (Vcp) Voltage	Vdc		5	
PLL Power Supply (Vcp) Current	mA		5	10
Operating Temperature Range	$^{\circ}\text{C}$	-40		+85