



Features and Benefits


Frequency Range:80-90MHz
Supply Voltage:5.0V
Current: 30mA Max.
3 wire serial integer PLL
Output power: +7.0dBm Max.
Phase noise: -112dBc/Hz@10KHz
Operating temperature: -40°C--+85°C
Size:15x15x3.7mm

Typical Applications

Broadcast
VHF radio
Wireless Telemetry
Test Instrument-Signal Generation

Mechanical Drawing & Pin Connections

Drawing No: MD240065-1

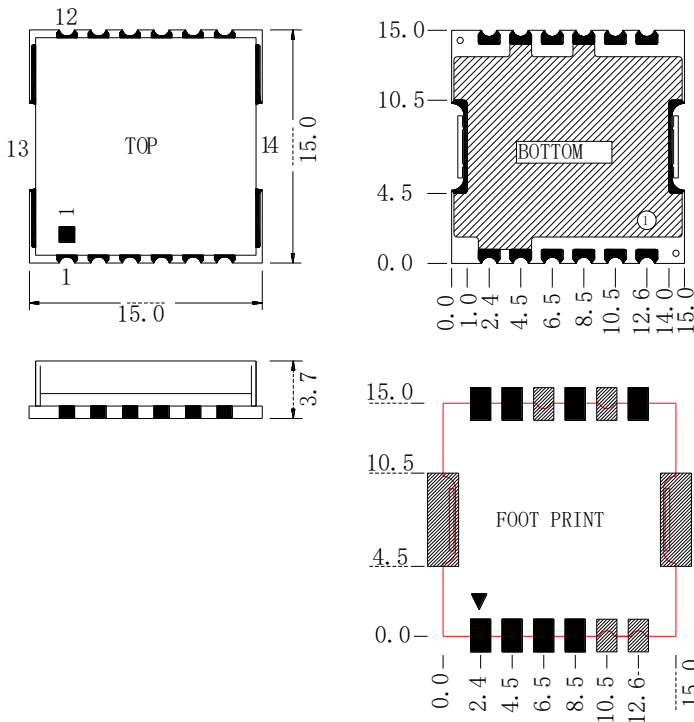

Pin Connections:

Pin	Function
1	CLK
2	DATA
3	LE
4	Ref. IN
5&6	GND
7	VCC(VCO)
8	GND
9	RF Out
10	GND
11	Lock Detect
12	Vcp(PLL)
13&14	GND

Unit in mm
1mm = 0.0394 inches



Specifications

Parameter	Units	Min.	Typical	Max.
Operating Frequency Range	MHz	80		90
Output Power	dBm	+3.0	+5.0	+7.0
Step Size	KHz		20	
Settling Time	msec		10	30
Output Impedance	Ω		50	
Phase Noise @1kHz offset	dBc / Hz		-84	-79
Phase Noise @10kHz offset	dBc / Hz		-112	-107
Phase Noise @100kHz offset	dBc / Hz		-136	-131
Phase Noise @1MHz offset	dBc / Hz		-155	-150
2nd Harmonic Suppression	dBc		-24	-20
Sideband Spurious Suppression	dBc			-80
Reference (input frequency)	MHz	5		100
Reference (input level)	dBm	-5		+5
VCO Power Supply (Vcc) Voltage	Vdc		5	
VCO Power Supply (Vcc) Current	mA		20	30
PLL Power Supply (Vcp) Voltage	Vdc		5	
PLL Power Supply (Vcp) Current	mA		5	10
Operating Temperature Range	$^{\circ}\text{C}$	-40		+85